

# FLX 16-2, FLX 14-2

## Bulk Spool Termination Manual

---

Thank you for choosing AudioQuest. This manual provides instruction for preparing and terminating a bulk (unterminated) speaker cable.

Please be careful when using sharp tools. We recommend wearing safety glasses.

To terminate AudioQuest speaker cables you will need the following tools:

- **Sharp knife or razor blade**
- **1.5 mm. Hex (Allen) wrench (supplied with SureGrip 300, 500 & 1000 Series spade & banana plugs)**
- **Small Philips screwdriver (for 500 and 1000 Series connectors)**

We recommend using the following tools, which can be found at:  
[audioquest.com/accessories](http://audioquest.com/accessories), then click "Tools."

- **Paladin jacket stripper**
- **Ideal articulated wire stripper**

# FLX 16-2 & FLX 14-2


## Step 1

Measure about 5.5" of cable. Using a sharp blade or a jacket cutter, carefully strip back the outer jacket and remove. This will expose the two conductor wires and two fillers inside.



## Step 2

Using a wire cutter, remove the two thin black fillers. Be careful not to cut the conductor wires.

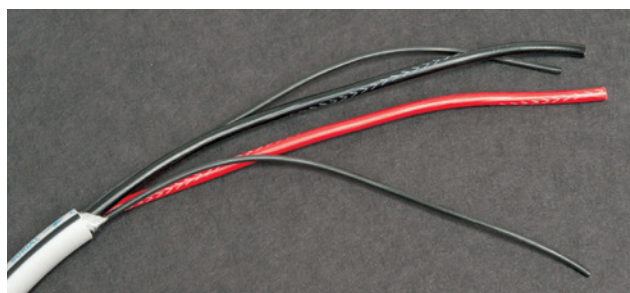


## Step 3

Using a wire stripper, remove 1/2" of insulation from each wire.



## Step 4

Insert the Red wire into a red-stripe speaker connector and tighten the connector's screws using a hex allen wrench. Insert the Black wire into a black-stripe speaker connector and tighten the connector's screws using a hex allen wrench.

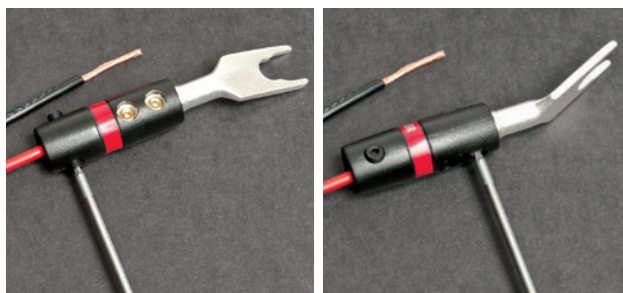

## Step 5

Ensure all connections are secure.

