



PowerQuest **303** **505** **707**

Power Conditioners with Noise-Dissipation and Non-Sacrificial Surge Protection


audioquest




A direction-controlled cable is crucial to maximizing RF-Noise dissipation — Included with every PQ model.



2RU rack mount “ears” included in the box.

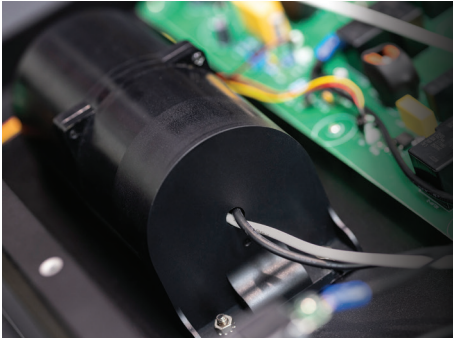

Better than the wall! Transient Power Correction and 45 amp on-demand current reservoir (shown) enable AQ Niagara level dynamics and jump-factor, like “the artist intended.”

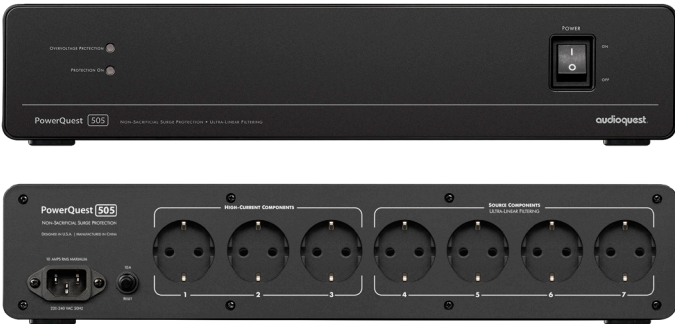

| | PQ 303 | PQ 505 | PQ 707 |
|----------------------------|---|---|---|
| Power Cable | Detachable PQ-416 / 2m Direction-Controlled | Detachable PQ-716 / 2m Direction-Controlled ZERO-Tech RF/ND-Tech | |
| Transient Power Correction | N/A | | 45 amps peak (upto 25 mS) |
| 7 Outlets | 4 x Linear-Filtered for Source / Constant-Current components (TVs, media streaming devices, etc.) 3 x High-Current for Variable-Current components (amplifiers, powered speakers & subwoofers) | | |
| Maximum RMS Current | 10 Amps (RMS) @ 220V | | |
| Dimensions and Weight | 43cm W x 34cm D x 8.6cm H (9cm w/ feet attached); 4.65 kg | 43cm W x 34cm D x 8.6cm H (9cm w/ feet attached); 4.9 kg | 43cm W x 38cm D x 8.6cm H (9.4cm w/ feet attached); 7.6 kg |
| Euro Retail | €599,00 | €799,00 | €1.299,00 |